

# A Novel Power Management Strategy for a Grid-Connected System by PV-FC Hybrid System

Shalini Kannaujia<sup>1</sup>, Er. Dharmendra Singh<sup>2</sup>

M. Tech Scholar<sup>1</sup>, Assistant Professor<sup>2</sup>, Department Of Electrical Engineering  
Shepherd Institute of Engineering and Technology (SSET), SHUATS, Allahabad

**Abstract:**

This paper deals with the power management strategy of grid connected photovoltaic and fuel cell hybrid system. Paper also presents the power management for grid connected output according to the PV system output. Here, the overall system consists of the hybrid PV and Fuel cell attached to the boost converter. The boost converter thus manages the final output voltage DC being fed to the inverter. Here, the DC to AC couples the controlled AC generated through the combination of both the modules and thus ties to the grid. Finally, the whole system is validating through MATLAB–Simulink environment.

**Keywords:** PV- FC Hybrid, grid, DC-DC Converters, power management, Fuel Cell, Inverter

I. INTRODUCTION

The system consists of a PV-FC hybrid sources with the main grid connecting to the boost converter and inverter. The energy in the hybrid system is balanced by boost converter to the inverter. On the other hand, fuel cell power generating system have been support to the PV generating so hybrid generation system consist of PV and fuel cell technogy are investigated for power generating. In this study, a grid connected fuel cell and PV power generating system was developed with Matlab Simulink .Solar module was developed based on solar model temperature and solar irradiation. Output current and voltage of PV system was used for input of boost converter and its output was used for the input of the inverter.

II. PHOTO-VOLTAIC (PV) POWER GENERATION

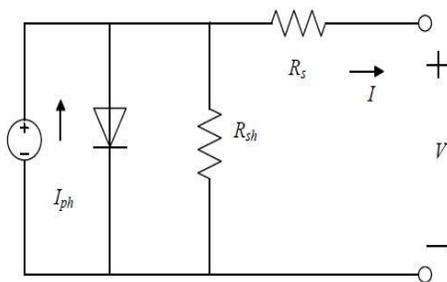


Fig. 1 PV Circuit Model

Currently, solar energy generates power in following ways: photovoltaic, concentrated thermal power generation and photochemistry. Solar photovoltaic generation is based on the photovoltaic effect. Sunlight irradiating on PV panels is transformed into electrical energy directly. It has advantages such as no emission, a long life, and the excellent applicability, etc. Its efficiency reaches 24.7%. Thus, PV generation becomes a widely used method.

So we can get the mathematical model of PV panel from the model,

$$I = I_{ph} - I_{os} \times \exp \left( \frac{q(V + IR_s)}{AkT} \right) - 1 - \frac{V + IR_s}{R_{sh}} \quad (i)$$

Where,

I: the output current of PV cell (A) V

: the output voltage of PV cell (V)

ph :the output current of photo-generated current source

Ios : the reverse saturation current of diode

k: Boltzmann's constant

q: elementary charge

T: PV battery working temperature (K)

III. BIDIRECTIONAL CONVERTER

In the microgrid, we often use a bidirectional converter to connect battery and grid. Since the output voltage of the battery is usually lower than the DC bus's voltage, so we use a boost converter from the battery to the DC bus, and a buck converter from DC bus to the battery,

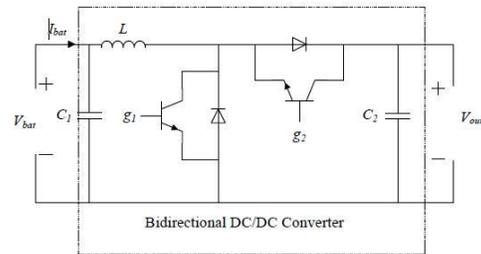


Fig 2 Bidirectional DC to DC Converter

When gate S1 has a signal 1 and gate S2 has a signal 0, this bidirectional converter works in boost mode, the power transmits from battery to the DC bus, the battery operates in discharge mode. When gate S1 has a signal 0 and gate S2 has a signal 1, the bidirectional converter works in buck mode, power transmits from the DC bus to the battery, the battery operates in charge mode.

IV. Hybrid Power Management System

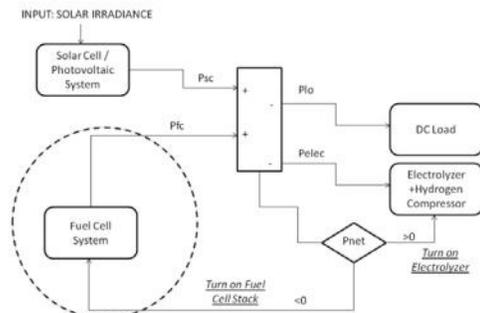


Fig 3. Power Management in grid tied power generation system

By increasing the use of renewable energy resources it is possible to support sustainable development of the global economy. Renewable energies include hydro 21 power, solid wastes, biomass, geothermal, solar thermal, solar photovoltaic, wind power, and fuel cell. The particular renewable energies that have shown progress and great potential for market penetration is photovoltaic (PV) and fuel cell.

. Therefore special kinds of power systems should be built to avoid shortages of power and to utilize all available energy from sun. There is an option to achieve it: power systems using two primary sources (solar cells and fuel cells) with an additional control scheme. This control scheme is well identified as a PMM implementation.

In the scenario of alternative and sustainable energy, the governments of developed countries are working to explore the potential of some sources of energy such as hydrogen. Hundreds of studies also have demonstrated that Fuel Cells, which use hydrogen and oxygen to produce electrical power, represent an essential device for the future large-scale generation of electrical energy. Fuel Cells are useful as power sources in remote locations such as rural farms, military bases, wastewater treatment plants, hospitals, office buildings and many others.

V. Proposed Model

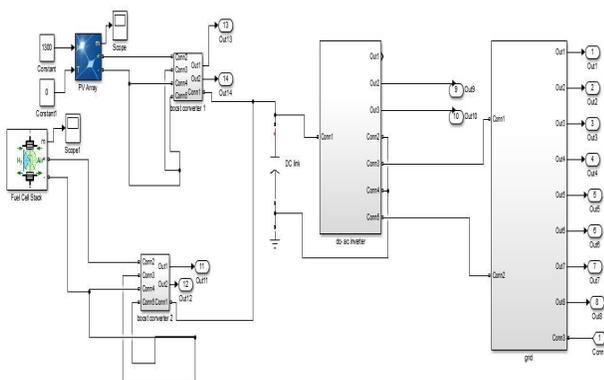


Fig. 4 Overall SIMULINK model of the proposed system

Figure presents the overall model of the proposed model. In this model, the PV array and Fuel Cell Stack is connected to the boost converter that is fed to the inverter. Here, the inverter converts the DC voltage generated by both the boost converters to the grid through the power coupling. In this case, the two sources such as PV and Fuel Cell is hybrid and thus used to perform the task of maintaining the final output power constant.

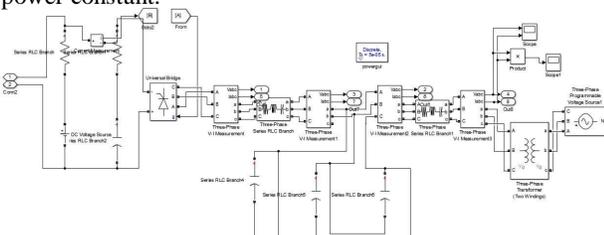


Fig. 5 Shows the grid model of the proposed system. A microgrid is a localized grouping of electricity sources and loads that normally operate connected to and synchronous with the traditional centralized grid (macrogrid), but can

disconnect and function autonomously as physical and/or economic conditions dictate.

Fig.5 Simulink model of the grid model

VI. Results & Discussion

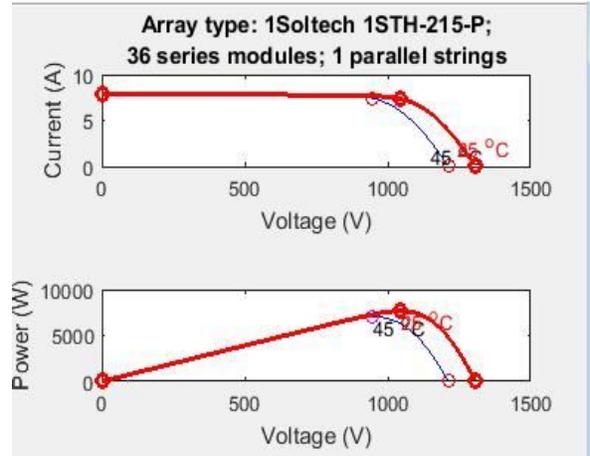


Fig 6 I-V Characteristics of PV

Figure 6 shows the I-V characteristics of the parallel strings of the PV array. The current characteristics are constant up to certain voltage. After it, falls down. Thus, the current of the PV array is constant with respect to the voltage. But, certainly depends on the temperature.

Also, the power generated depends on the generated voltage. But, beyond certain voltage the power tends to fail as the current begins to drop.

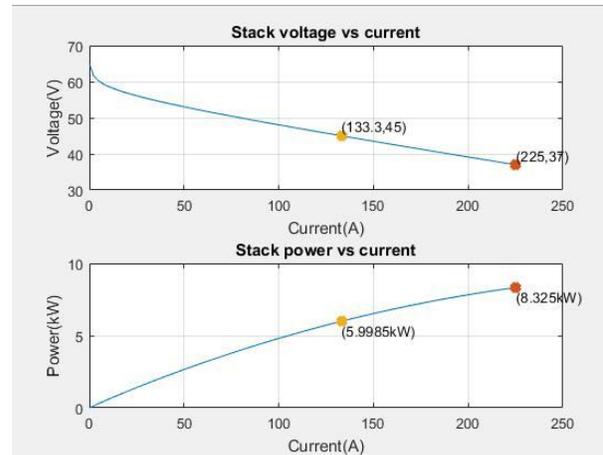


Fig 7 Voltage and Power Characteristics of Fuel Cell stack

In Figure 7, it shows that if we decrease the current density,

the cell voltage and thus efficiency increase. But if we need to obtain a certain amount of power, the active cell area must increase as the current density is decreased. We operate the cell at the left side of the power density peak and at a point that yields a good compromise of low operating point.

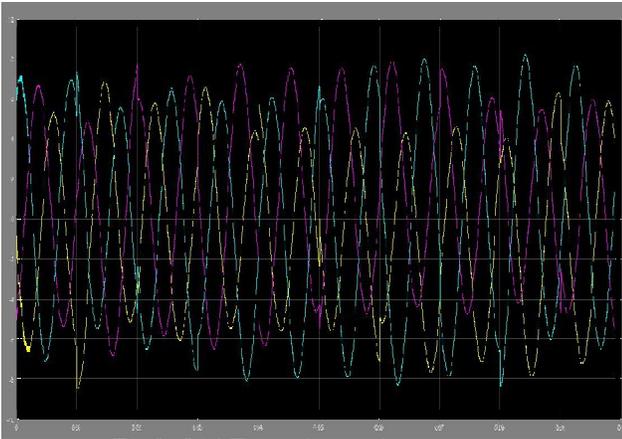


Fig 8. Grid Three phase voltage output curve

Figure 8 represents the output voltage of the grid as the power is being managed by the hybrid PV-FC based generation. The three phase power has been managed by the PV-FC based power management. The boost converter and the inverter couples with that of the grid and thus has been maintaining the output voltage constant. Thus, this output curve validates the proposed model that the power has been managed in the PV-FC connected grid.

#### VII. CONCLUSION

This paper deals with the power management strategy of grid connected photovoltaic and fuel cell hybrid system. The system consists of a PV-FC hybrid sources with the main grid connecting to the boost converter and inverter. The energy in the hybrid system is balanced by boost converter to the inverter. On the other hand, fuel cell power generating system have been support to the PV generating so hybrid generation system consist of PV and fuel cell technology are investigated for power generating. Thus, using the simulation results, the power management for grid connected output according to the PV system and Fuel cell output has been validated. The power management and optimisation for the both utility has been shown through the graph. Finally, the whole system is validating through MATLAB–Simulink environment.

#### VIII. REFERENCES

- [1] Mohamed O. Badawy ; Yilmaz Sozer, “Power Flow Management of a Grid Tied PV-Battery System for Electric Vehicles Charging”, IEEE, 2016
- [2] Mohamed Azab, “Flexible PQ control for single-phase grid-tied photovoltaic inverter”, IEEE, 2017
- [3] Mohamed O. Badawy ; Fatih Cingoz ; Yilmaz Sozer, “Battery storage sizing for a grid tied PV system based on operating cost minimization”, IEEE,2016
- [4] K. R. Tan ; T. Logenthiran ; W. L. Woo ; R. T. Naayagi, “Smart home demonstration on LabVolt Home Energy Production Training System”, IEEE, 2016
- [5] Nasif Mahmud ; Ahmad Zahedi ; Asif Mahmud, “ANFISPID-based voltage regulation strategy for grid-tied renewable DG system with ESS”, IEEE, 2016
- [6] Ashna Mohan ; Dinto Mathew, “High performance stand-alone and grid connected inverter using adaptive total sliding mode controller”, IEEE, 2013
- [7] Ali Hooshmand ; Babak Asghari ; Ratnesh K. Sharma, “Experimental Demonstration of a Tiered Power Management System for Economic Operation of Grid-Tied Microgrids”, IEEE, 2014
- [8] Emilio Perez ; Hector Beltran ; Néstor Aparicio ; Pedro Rodriguez, “Predictive Power Control for PV Plants With Energy Storage”, IEEE, 2013
- [9] Sangita Sharma ; David W. Galipeau, “Optimization of residential grid-tied PV systems without net-metering using load management”, IEEE, 2012
- [10] Inam Ullah Nutkani ; P.C. Loh ; Frede Blaabjerg, “Distributed control of hybrid AC microgrids with dynamic active and reactive power capacity tuning”, IEEE, 2012
- [11] Ashitha P.N. ; J. S. Lather, “Fuzzy PI based power sharing controller for grid tied operation of a fuel cell”, IEEE, 2016
- [12] Maxx Patterson ; Narciso F. Macia ; Arunachala M. Kannan, “Hybrid Microgrid Model Based on Solar Photovoltaic Battery Fuel Cell System for Intermittent Load Applications”, IEEE, 2015
- [13] R. B. P. U. S. B. Kodanda Ram ; M. Venu Gopala Rao, “Performance of a hybrid AC/DC microgrid using RES and super capacitor in grid connected and islanded mode”, IEEE, 2014
- [14] S. Tamalouzt ; N. Benyahia ; T. Rekioua ; R. Abdessemed, “A Doubly Fed induction generator wind turbine and fuel cell hybrid power sources system for micro-grid applications”, IEEE, 2015
- [15] K. Balachander ; S. Kuppusamy ; P. Vijayakumar, “Comparative study of hybrid photovoltaic-fuel cell system/hybrid wind-fuel cell system for smart grid distributed generation system, IEEE, 2012
- [16] Omid Palizban ; M.A. Rezaei ; Saad Mekhilef, “Active and reactive power control for a hybrid system with photovoltaic panel, wind turbine, fuel cells, electrolyzer and super capacitor in off-grid mode”, IEEE, 2011
- [17] D. Cabezuelo ; J. Andreu ; I. Kortabarria ; I. Mtz. de Alegría ; E. Robles, “Powertrain systems of electric, hybrid and fuel-cell vehicles: State of the technology”, IEEE, 2017

- [18] Huan Li ; Alexandre Ravey ; Abdoul N'Diaye ; Abdesslem Djerdir, “Equivalent consumption minimization strategy for fuel cell hybrid electric vehicle considering fuel cell degradation”, IEEE, 2017
- [19] Michael Lewis ; Clay Hearn ; Xianyong Feng ; Jason Hanlin ; Jaimie Levin ; Joseph Ambrosio ; Peter Guggenheim ; Craig , “Design and modeling for hydrogen fuel cell conversion of parcel delivery trucks”, IEEE, 2017
- [20] Daming Zhou ; Fei Gao ; Alexandre Ravey ; Ahmed Al-Durra ; Marcelo Godoy Simões, “Online energy management strategy of fuel cell hybrid electric vehicles based on time series prediction”, IEEE, 2017